



PRODUCT CODE

IS1005si & IS1006si

DESCRIPTION

Kerf or bulb-type silicone rubber compression seals.

APPLICATION

A durable silicone compression seal that is kerf-mounted into the rebates of door and window frames.

KEY FEATURES

- Durable, tear resistant silicone rubber.
- Kerf-mounting provides for easy press-fit installation.
- Ideal smoke seal for single action doors.

MATERIALS

High performance silicone rubber.

GAP SIZE

IS1005si	Minimum 3mm — Maximum 5mm
IS1006si	Minimum 3mm — Maximum 6mm

SIZES

Standard Lengths	50 metre coil
Also available in	100 metre coils.

FINISH

Standard colours	Grey, black, brown.
	Other colours to special order.

FIXING

The Lorient IS1005si (or IS1006si) seal is pressed into a prefabricated groove (or saw cut) in the rebate of doors or window frames.


APPROVAL/S

- Complies with the deemed to satisfy provisions of BCA C3.4 resisting smoke at 200°C for 30 minutes (when fitted to compliant door leaf).

SPECIFICATIONS

Lorient IS1005si (or IS1006si) silicone smoke seal fitted into a standard interference fit groove in the rebate of doors or window frames.

IS1005si

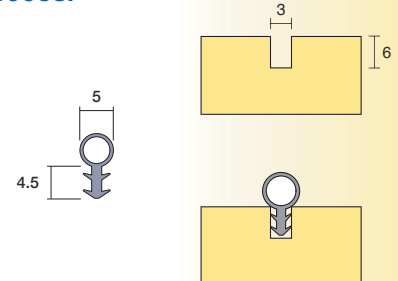

IS1006si

