





IS3020

IS3021


Fitting Instruction

Door Bottom or Meeting Stile

Length



**MEETING STILE
INSTALLATION DETAIL**

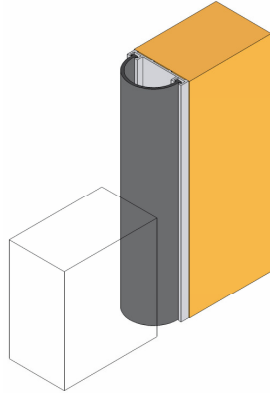

STEP 1
Measure door height and cut the seal to suit, using a sharp knife for the rubber seal and a saw (power or hand) for the aluminum section.


STEP 2
Remove one side of the rubber seal from the carrier and screw fix the aluminum section onto the stile using the screws supplied (fixing holes are pre-slotted.)

STEP 3
Push fit the rubber sealing element back into the carrier to form "U" shape section.

NB: The rubber gasket simply presses back into the profile.

STEP 4
Ends of the aluminum channel can be centre punched to prevent seal moving in the carrier

**DOOR BOTTOM
INSTALLATION DETAIL**

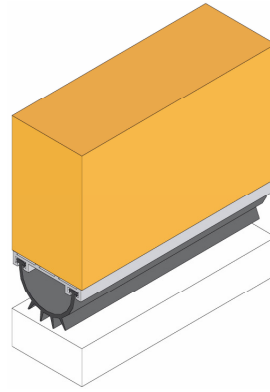

STEP 1
If installed, remove door from its hinge, lay the door on its edge and firmly restrain.

STEP 2
Measure door width and cut the seal to suit, using a sharp knife for the rubber seal and a saw (power or hand) for the aluminum section.

STEP 3
Remove one side of the rubber seal and screw fix the aluminum section onto the door bottom using the screws supplied.

STEP 4
Push fit the rubber sealing element back into the carrier to form "U" shape section. The aluminum channel can be centre punched to prevent seal movement

STEP 5
Re-hang the door. .

IMPORTANT – Ensure that the installation of this product does not impede the opening or closing of the door. It is recommended to check the adjustment of the door seal periodically to ensure the door assembly to which it is fitted, closes and latches properly.

The seal may be removed for periodic cleaning or replacement of a worn gasket, without removing the door leaf from its hinges

We recommend the IS3020 or IS3021 be used together with a Lorient Integrity™ 4000 series threshold plate.

OTHER INTEGRITY™ ARCHITECTURAL SEALS INCLUDE:

- Door Perimeter Seals
- Door Bottom Seals
- Automatic Door Bottom Seals
- Threshold Plates
- Brush Seals
- Magnetic Seals

Contact your nearest Lorient office for further details.

NOTE

Recommendations as to methods for use of materials and construction details are based on the experience and knowledge of Lorient and are given in good faith as a general guide and service to designers, contractors and manufacturers.

Lorient reserves the right to make alterations or delete any installation detail without prior notice.

DESCRIPTION OF CONTENTS

- Aluminium carrier (1)
- Pre-slotted holes (2)
- Flexible "Push-fit" gasket (3)
- Bag of screws
- Fitting instructions

TOOLS REQUIRED FOR INSTALLATION

- Tape measure
- Saw (power or hand)
- Screw driver
- Drill (power or hand)
- Knife
- Pencil or marker
- Router



Architectural Seals

AUSTRALIA
Lorient Australia
Tel 1300 858 010

ASIA PACIFIC
Lorient Pacific Limited Hong Kong
Tel: (+852) 2505 0328

EUROPE
Lorient Polyproducts Ltd UK
Tel: (+44) 1626 834252

MIDDLE EAST
Lorient Middle East Building Materials Trading LLC Dubai
Tel (+971) 4267 4339
Fax (+971) 4267 5339