


PRODUCT CODE
IS7310si & IS7320si
DESCRIPTION

Adjustable aluminium meeting stile seals and door edge seals for frameless glass doors, incorporating high temperature silicone gaskets.

APPLICATION

Designed to suit 10mm to 15mm frameless glass doors, to ensure ambient/medium temperature smoke containment, along with draught and dust protection. They also protect glass doors from colliding during closure.

KEY FEATURES

- Aesthetic, adjustable, anodised aluminium carriers to suit 10mm to 15mm glass doors.
- High performance, silicone gaskets (male and female) to ensure an excellent seal is created, resisting smoke up to 200°C for 30 minutes.
- Easy clip-on application.
- Can be used independently for various glass door applications.

MATERIALS

IS7310si: An extruded, clear anodised aluminium two-piece carrier combined with a high performance silicone gasket, incorporating projecting reinforced fins.

IS7320si: An extruded, clear anodised aluminium two-piece carrier combined with a high performance silicone compression gasket.

GAP SIZE Dependent upon application.

SIZES

Standard Lengths 2250mm
Also available in 250mm increments: 1000mm to 5000mm
 Seals can be cut on-site for exact dimensions.

FINISH

- Clear anodised aluminium with grey silicone gaskets.


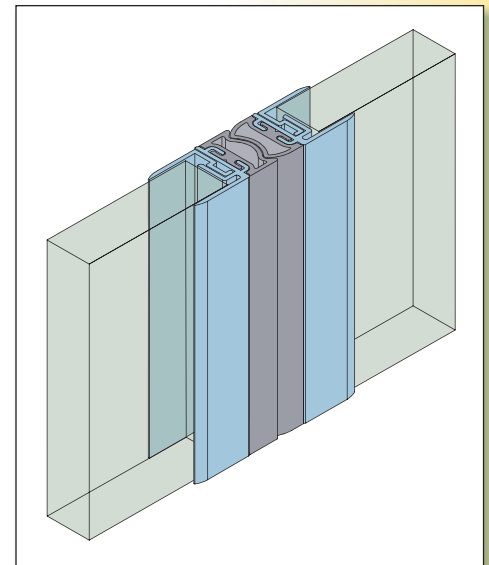

FIXING

Simply clips onto the door edge and cements into position (dependent on the glass thickness). Detailed fixing instructions are supplied.

SPECIFICATIONS

Lorient IS7310si /IS7320si fitted to the edges of glazed door openings.

Lorient IS7300si door set (1 x IS7310si, 1 x IS7320si) fitted to the meeting stile edges of frameless glass door.

IS7310si

IS7320si


Above: IS7300si meeting stile set.