

Proprietary Automatic Sliding Glazed Smoke Doors

Single & Double Leaf/Sliding

ISS BE-05


(Complete Performance Smoke Sealing System for Besam Proprietary Automatic Sliding Door Assembly)

See table below for specified sets.



Application:

This sealing combination is suitable for typical fire engineered specifications where designated medium temperature smoke leakage rates are required to be met in accordance with AS6905, as tested to AS1530 Part 7.

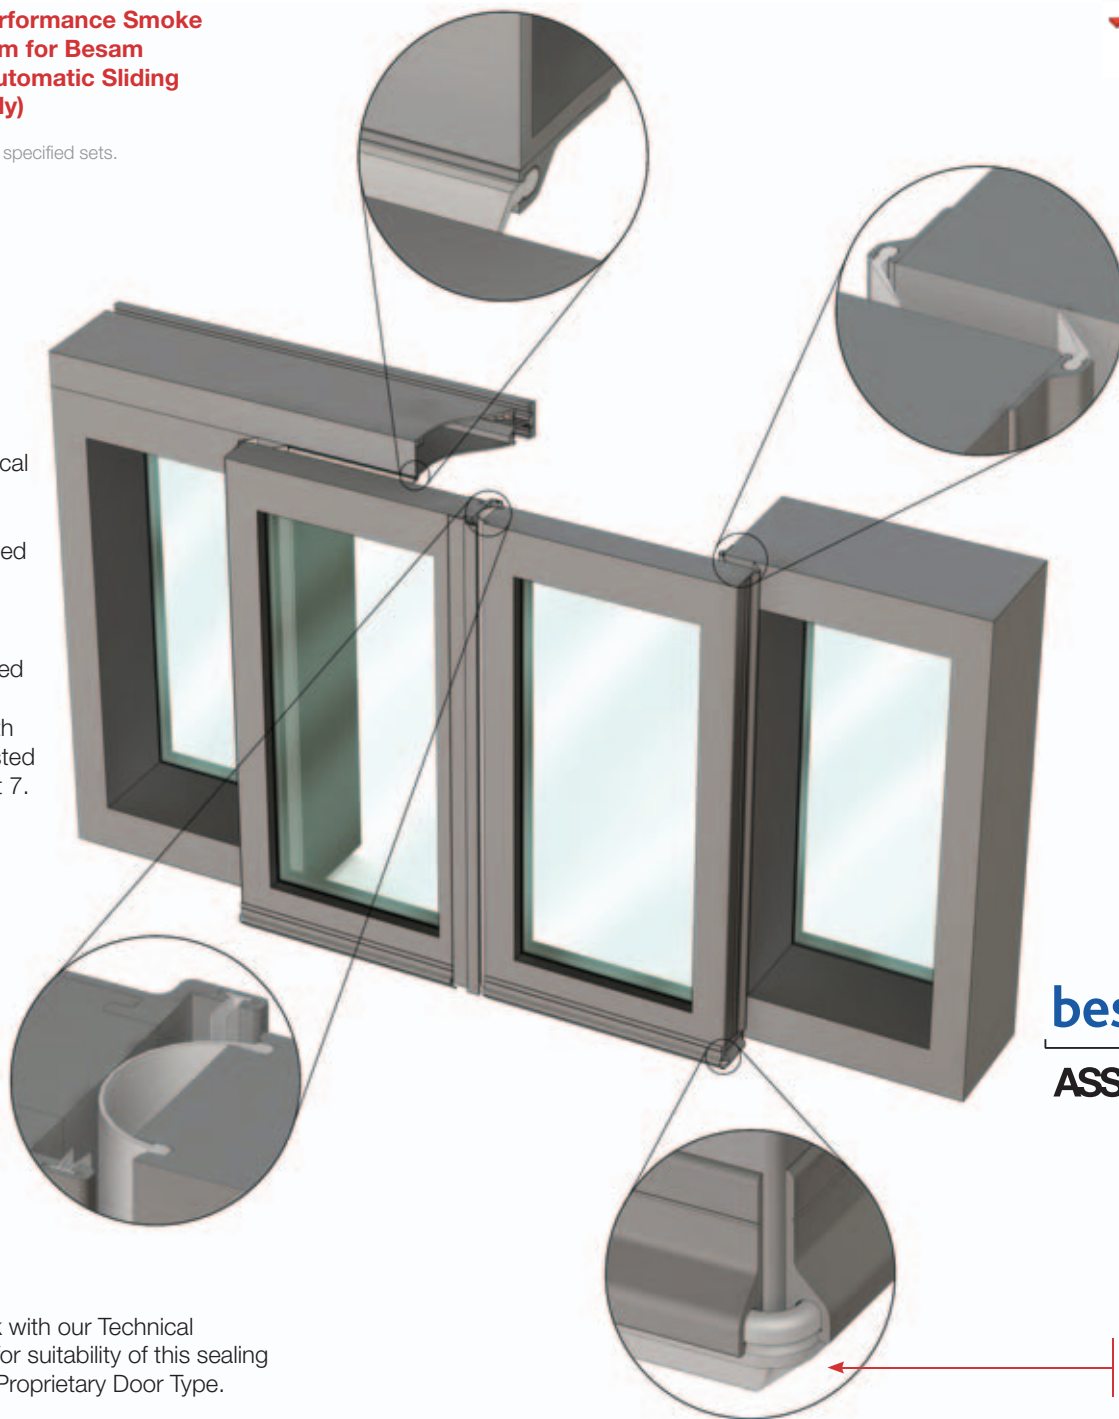

besam
ASSA ABLOY

Note/s:

- ◀ Please check with our Technical Department for suitability of this sealing system with Proprietary Door Type.

IS5177Asi silicone fin reversed under door leaf.

Each ISSBE (Proprietary Besam set) contains the following combination of specialised sealing sections:

- > ISRG7070si Silicone Fin Seal
- > HPMSsi Silicone Compression Seal
- > IS5177Asi Silicone Sweep Seal



Available in the following specified sets:

Single sliders up to a maximum of 3000mm (h) x 1120mm (w)
Bi-parting sliders up to a maximum of 3000mm (h) x 2400mm (w)

Door Configuration	Lorient Product Code	Maximum door size
Single Slider	ISS BE-01	2100mm (h) x 1120mm (w)
Bi-Parting Slider	ISS BE-02	2100mm (h) x 1900mm (w)
Bi-Parting Slider	ISS BE-03	2100mm (h) x 2400mm (w)
Bi-Parting Slider	ISS BE-04	3000mm (h) x 1900mm (w)
Bi-Parting Slider	ISS BE-05	3000mm (h) x 2400mm (w)
Single Slider	ISS BE-06	3000mm (h) x 1120mm (w)