



## Acoustic Sealing Solutions

### Solution for Fire-Rated Proprietary Door to Achieve Rw30

Single Leaf / Single Swing

#### IS7025si & IS8011si


##### Description

**IS7025si perimeter seal** - slim-line, stop-mounted acoustic & smoke seal featuring a durable silicone bulb.

**IS8011si automatic door bottom seal** - medium duty, face-fixed or semi-mortised automatic door bottom seal.

##### Application

This sealing combination suitable for typical fire-rated entry doors & passage doors for apartments, hotels, motels & aged care facilities where a sound insulation minimum of Rw30 is required.

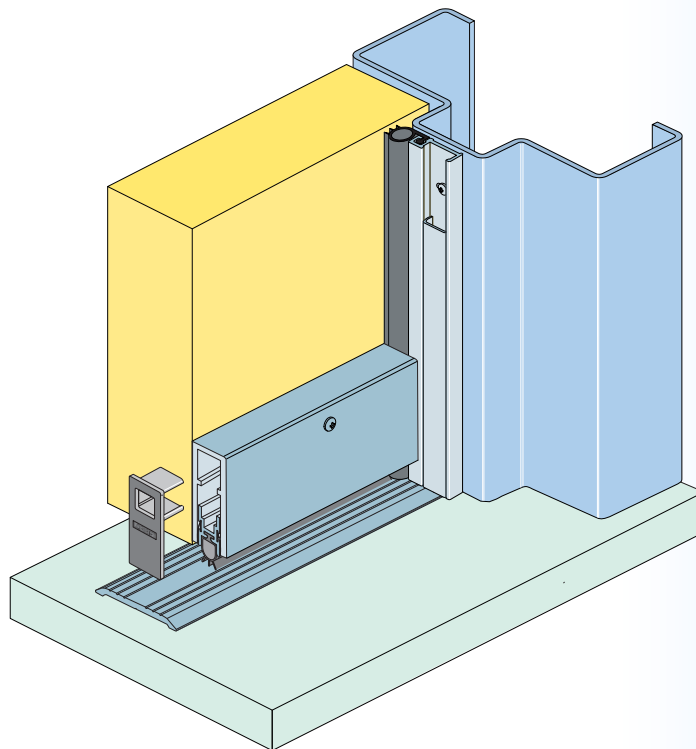

\* Shown with an IS4130 threshold plate to provide an optimum sealing surface for door bottom seals.

Please contact our office if you require any further information

NSW Ph: (02) 9907 3844 Fax: (02) 9907 3855

VIC Ph: (03) 9785 2688 Fax: (03) 9785 2386

QLD Fax: (07) 3635 5000 Fax: (07) 3861 9266

E-mail [integrity@lorient.com.au](mailto:integrity@lorient.com.au)

[www.lorient.com.au](http://www.lorient.com.au)

Datasheet D-SOL002-08/08. Other datasheets available on request. Copyright © 2008 Lorient Australia