



Acoustic Sealing Solutions

Solution for Non-Rated 40mm Solid Core Timber Door to Achieve Rw30

Single Leaf / Single Swing

IS7080si & IS8090si


Description

IS7080si perimeter seal - compact, stop-mounted acoustic & smoke seal featuring a durable silicone bulb.

IS8090si automatic door bottom seal - heavy duty, face-fixed or semi-mortised automatic door bottom seal.

Application

This sealing combination suitable for typical solid core timber entry & passage doors for apartments, hotels, motels & aged care facilities where a sound insulation minimum of Rw30 is required.

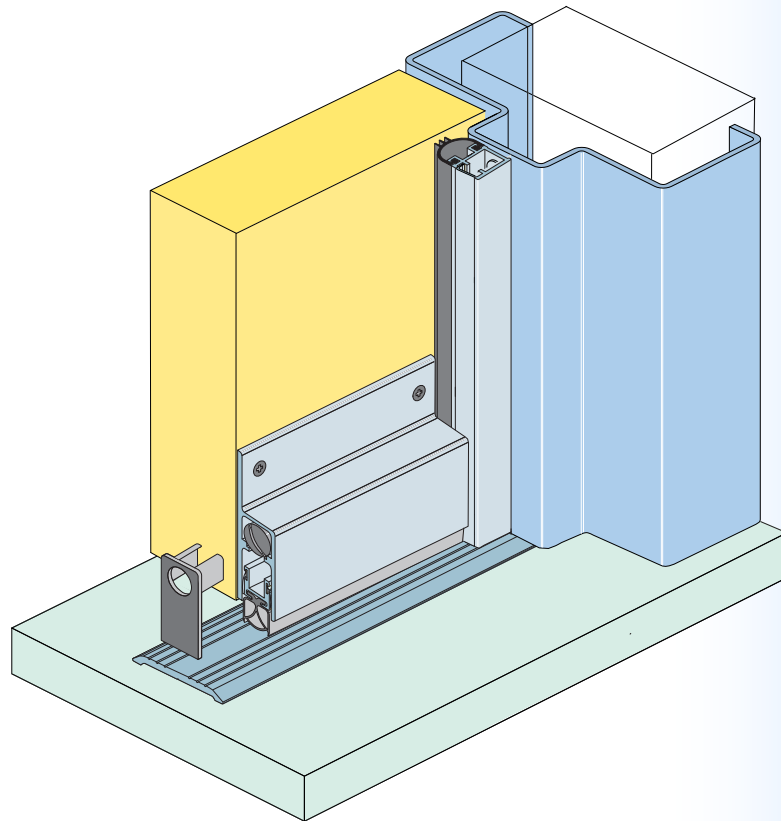

* Shown with an IS4130 threshold plate to provide an optimum sealing surface for door bottom seals.

Please contact our office if you require any further information

NSW Ph: (02) 9907 3844 Fax: (02) 9907 3855

VIC Ph: (03) 9785 2688 Fax: (03) 9785 2386

QLD Fax: (07) 3635 5000 Fax: (07) 3861 9266

E-mail integrity@lorient.com.au

www.lorient.com.au

Datasheet D-SOL013-08/08. Other datasheets available on request. Copyright © 2008 Lorient Australia