



Acoustic Sealing Solutions

Solution for Non-Rated 40mm Solid Core Timber Door to Achieve Rw30

Double Leaf / Single Swing

IS7025si / IS7070si / IS8090si

Description


IS7025si perimeter seal - slim-line, stop-mounted acoustic & smoke seal featuring a durable silicone bulb.

IS7070si perimeter seal - slim-line perimeter & astragal seal with twin-finned, high performance silicone gaskets.

IS8090si automatic door bottom seal - heavy duty, face-fixed or semi-mortised automatic door bottom seal.

Application

This sealing combination suitable for typical double entry doors & passages for apartments, hotels, motels & aged care facilities where a sound insulation minimum of Rw30 is required.

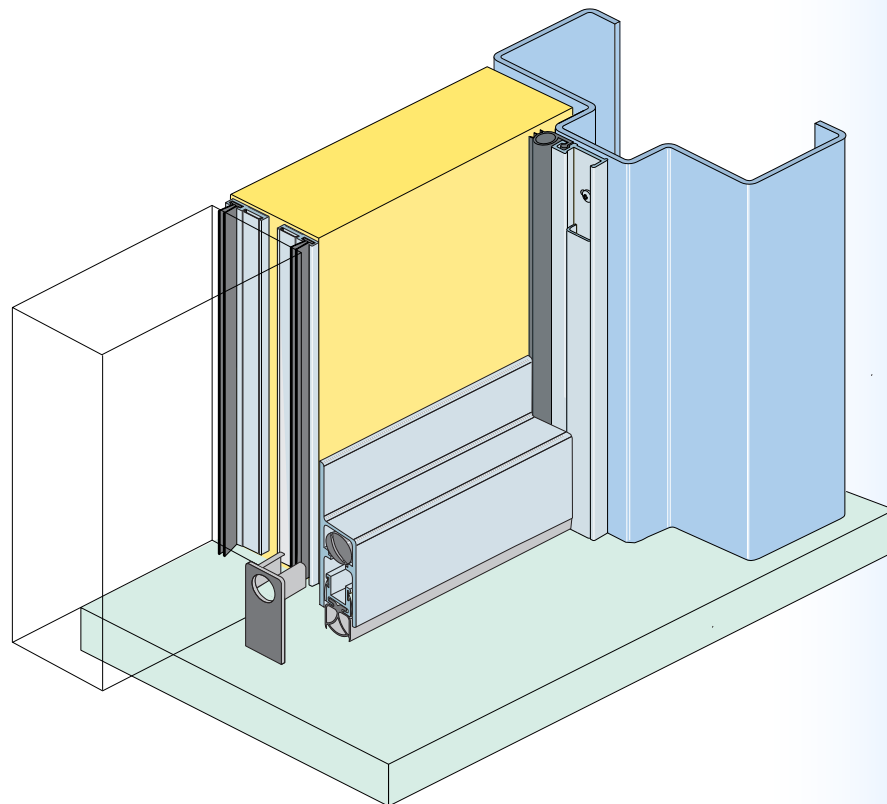

Please contact our office if you require any further information

NSW Ph: (02) 9907 3844 Fax: (02) 9907 3855

VIC Ph: (03) 9785 2688 Fax: (03) 9785 2386

QLD Fax: (07) 3635 5000 Fax: (07) 3861 9266

E-mail integrity@lorient.com.au

www.lorient.com.au

Datasheet D-SOL021-08/08. Other datasheets available on request. Copyright © 2008 Lorient Australia