



LSR3012

A multi-blade storm-proof door bottom seal and threshold plate. Ideal for protecting your home from the elements. A decorative cover strip on the door bottom seal conceals fixings for an aesthetic finish.



STORM PROOF DOOR SEAL

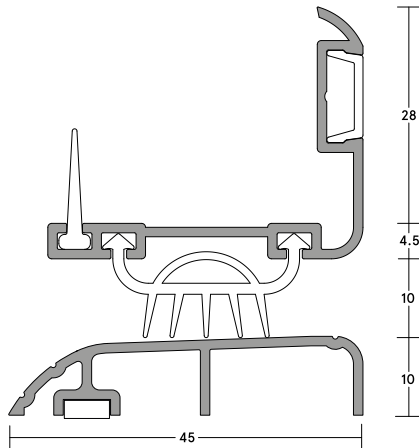

LSR3012 si



LSR3012 si

SYSTEM SPECIFICATION

Key benefits

- ▶ Weatherproof door seal.
- ▶ Decorative cover strip to conceal fixings.
- ▶ Easily accommodates larger gap sizes.
- ▶ Hard-wearing and durable.
- ▶ Durable silicone rubber gaskets.

Performance

- ▶ Protects against weather, light, cold, draught, bushfire embers, sound, insects and vermin.

Approvals

- ▶ Bushfire: Approved for use on fire door assemblies for Bushfire attack levels of BAL<29.

Location

- ▶ Opening side of the door.
- ▶ Closing side of the door.
- ▶ Ideal for security screens.

Gap size

- ▶ 22mm – 24mm.

Standard length

- ▶ 1000mm.

Seal material

- ▶ Aluminium carrier with a flexible silicone rubber gasket.

Fixing method

- ▶ **Threshold plate:** Fixing holes are pre-drilled for ease of application. Fixing screws are supplied.
- ▶ **Door bottom seal:** Fixing holes are pre-drilled and slotted to allow the seals to be adjusted and positioned accurately. Fixing screws are supplied. A snap-fit cover strip to conceal fixings is supplied.

Finishes

- ▶ Silver anodised aluminium with grey cover strip and grey silicone rubber blade.