

DROP SEALS



LAS8001M

HEAVY DUTY

A slimline, mortised automatic drop seal for timber sliding doors. The end plate cleverly conceals a magnet which engages with a button in the frame, to assist the door closure and ensures the gasket remains in the dropped position without forcing the door open. The seal features a high efficiency mechanism, which lifts the seal clear of the floor as soon as the door is opened by a few millimetres: resulting in lower door operating forces.



DROPS&SEALS

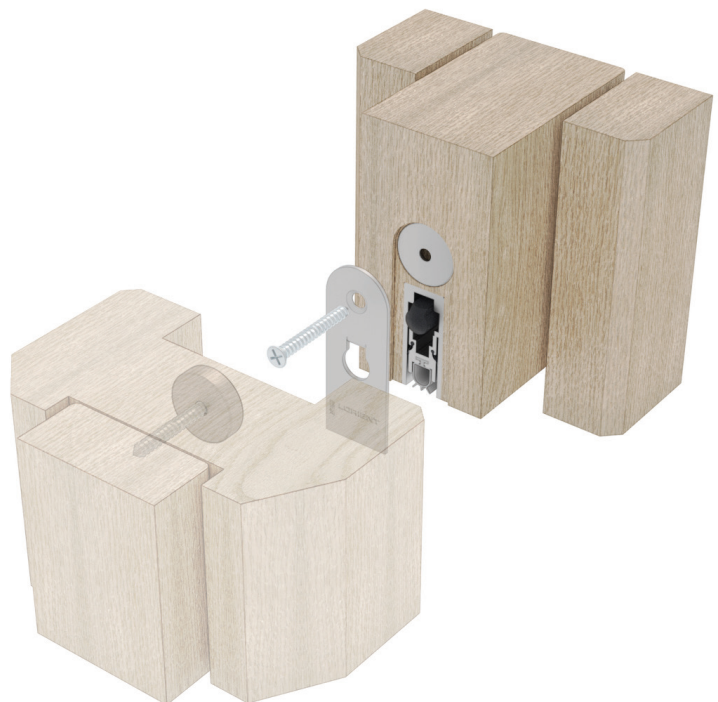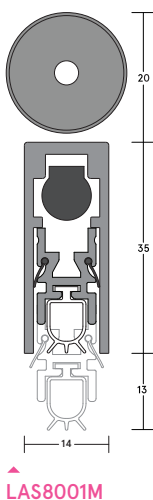

SYSTEM SPECIFICATIONS

Performance

- Protects against sound, smoke, draught, light and insects.
- Suitable for wheeled traffic.

Location

- Sliding doors.

Use with

- Any perimeter seal. Any threshold plate.

Min/max gap size

- 1mm/13mm.

Seal material

- Grey or black silicone rubber.

Standard lengths

- 820mm (may be cut back to 735mm)
- 920mm (may be cut back to 820mm)
- 1070mm (may be cut back to 920mm)
- 1220mm (may be cut back to 1070mm)
- 1400mm (may be cut back to 1220mm).

Fixing

- Fixing screws are supplied. This seal is mortised. Pre-drilled radiused end plates are supplied which also secure the product in place. (Square end plates available on request).
- Magnetised button is supplied to fix into the frame.

Adjustment

- Self-levelling on uneven surfaces. Can be adjusted independently of the fixing screws.

Finishes

- Silver anodised aluminium with silver end plates, and grey silicone rubber gasket.
- Silver anodised aluminium with bronze end plates, and black silicone rubber gasket.
- Chrome finish magnetised button.